

Pb Free Plating Product

FEP16BTA/FEP16DTA/FEP16FTA/FEP16GTA/FEP16HTA/FEP16JTA



16.0 Ampere Heatsink Dual Common Anode Ultra Fast Recovery Rectifiers

**Features**


- ★ Fast switching for high efficiency
- ★ Low forward voltage drop
- ★ High current capability
- ★ Low reverse leakage current
- ★ High surge current capability

**Application**

- ★ Automotive Inverters and Solar Inverters
- ★ Plating Power Supply, SMPS and UPS
- ★ Car Audio Amplifiers and Sound Device Systems

**Mechanical Data**

- ★ Case: Heatsink TO-220AB open metal package
- ★ Epoxy: UL 94V-0 rate flame retardant
- ★ Terminals: Solderable per MIL-STD-202 method 208
- ★ Polarity: As marked on diode body
- ★ Mounting position: Any
- ★ Weight: 2.2 gram approximately

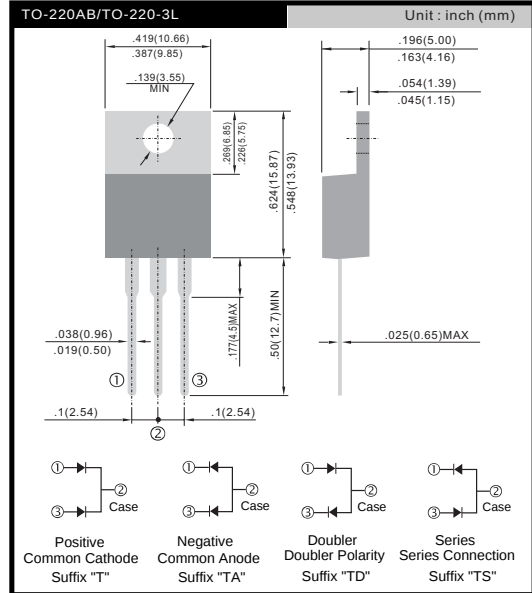**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

|                                                                                                        | SYMBOL                            | FEP16BTA<br>FEP16DTA | FEP16FTA<br>FEP16GTA | FEP16HTA<br>FEP16JTA | UNIT     |
|--------------------------------------------------------------------------------------------------------|-----------------------------------|----------------------|----------------------|----------------------|----------|
| Maximum Recurrent Peak Reverse Voltage                                                                 | V <sub>RRM</sub>                  | 200                  | 400                  | 600                  | V        |
| Maximum RMS Voltage                                                                                    | V <sub>RMS</sub>                  | 140                  | 280                  | 420                  | V        |
| Maximum DC Blocking Voltage                                                                            | V <sub>DC</sub>                   | 200                  | 400                  | 600                  | V        |
| Maximum Average Forward Rectified Current T <sub>c</sub> =100 °C (Total Device 2x8A=16A)               | I <sub>F(AV)</sub>                | 16.0                 |                      |                      | A        |
| Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)      | I <sub>FSM</sub>                  | 175                  | 150                  |                      | A        |
| Maximum Instantaneous Forward Voltage @ 8.0 A (Per Diode/Per Leg)                                      | V <sub>F</sub>                    | 0.98                 | 1.3                  | 1.7                  | V        |
| Maximum DC Reverse Current @T <sub>J</sub> =25 °C At Rated DC Blocking Voltage @T <sub>J</sub> =125 °C | I <sub>R</sub>                    | 5.0<br>100           |                      |                      | μA<br>μA |
| Maximum Reverse Recovery Time (Note 1)                                                                 | T <sub>rr</sub>                   | 35                   |                      |                      | nS       |
| Typical junction Capacitance (Note 2)                                                                  | C <sub>J</sub>                    | 90                   |                      |                      | pF       |
| Typical Thermal Resistance (Note 3)                                                                    | R <sub>θJC</sub>                  | 2.0                  |                      |                      | °C/W     |
| Operating Junction and Storage Temperature Range                                                       | T <sub>J</sub> , T <sub>STG</sub> | -55 to + 150         |                      |                      | °C       |

NOTES : (1) Reverse recovery test conditions I<sub>F</sub> = 0.5A, R = 1.0A, I<sub>rr</sub> = 0.25A.

(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.

(3) Thermal Resistance junction to case.

FIG.1 - FORWARD CURRENT DERATING CURVE

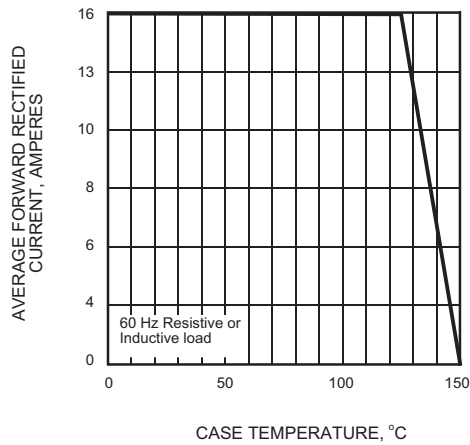


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

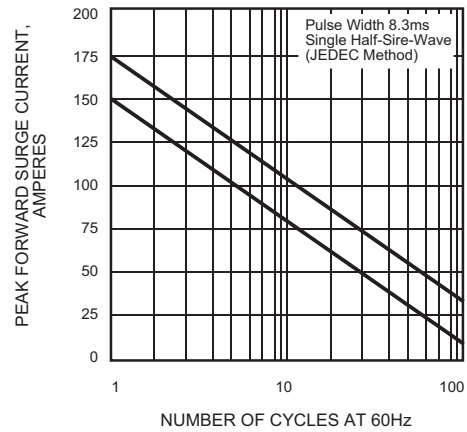


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

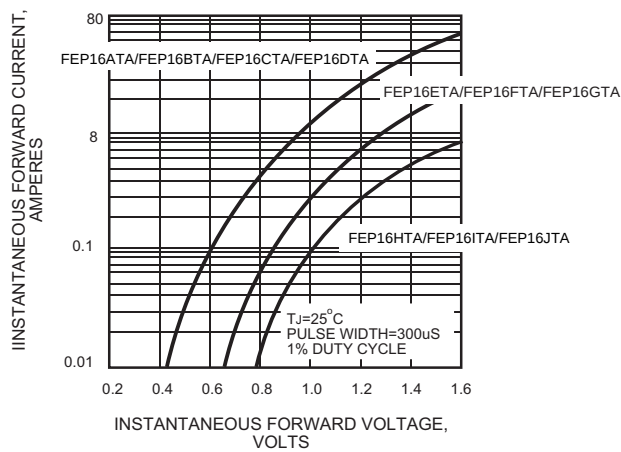


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

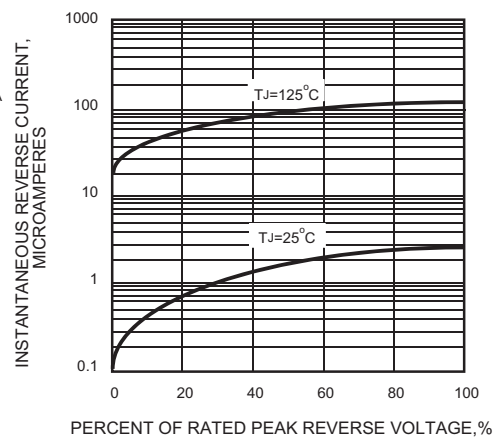


FIG.5 - TYPICAL JUNCTION CAPACITANCE

